

TARALAY IMPRESSION & UNI

gerflor.com



Gerflor[®]
theflooringroup






TARALAY IMPRESSION




0373 - Noma Ice




0723 - Charme Pecan




0719 - Infinity Lichen



0068 - Renzo Pecan




0025 - Renzo Taupe



0726 - Sycamore Dark



0519 - Noma Beige




0680 - Infinity Greige



0725 - Sycamore Light Brown



0773 - Portobello



0734 - Loft Chestnut



0371 - Noma Rustic



1314 - Walnut brown

TARALAY IMPRESSION



0538 - Habana Vinales



0722 - Herringbone Blond



0522 - Habana Trinidad



0724 - Herringbone Chatain




0721 - Charme Natural






0528 - Walnut Cream



0720 - Infinity Aube



0727 - Sycamore Vanilla



0760 - Moon Island



0671 - Loft Light Brown

TARALAY IMPRESSION & UNI



0769 - Mohair White



0523 - Cemento Genova



0543 - Cemento Brescia



0767 - Mohair Natural



0524 - Cemento Capri



0766 - Mohair Dark



0525 - Cemento Modena




0770 - Gentlemen Clear



0771 - Gentlemen Grey




0772 - Gentlemen Coffee

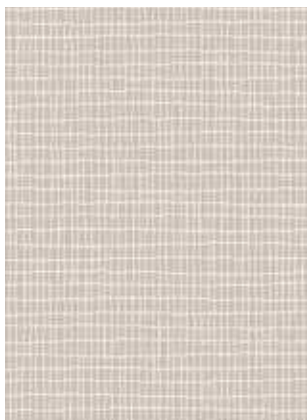


0774 - Trame Clear



0776 - Trame Beige

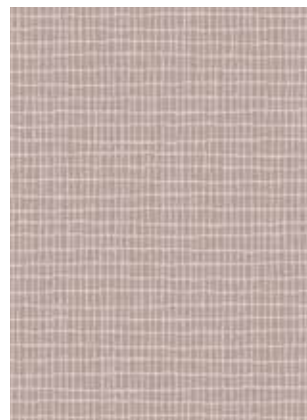

0777 - Trame Rose

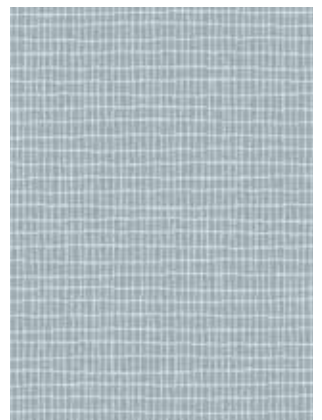


0775 - Trame Blue




0730 - Corner Light Beige



0756 - Kubes Beige




6267 - Uni Beige

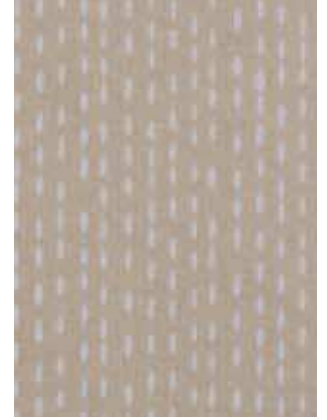


0736 - Rice Champagne




0728 - Corner Offwhite



6273 - Uni White

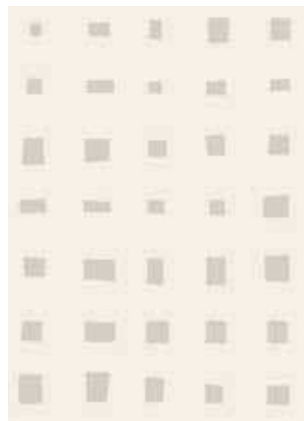

0755 - Kubes White

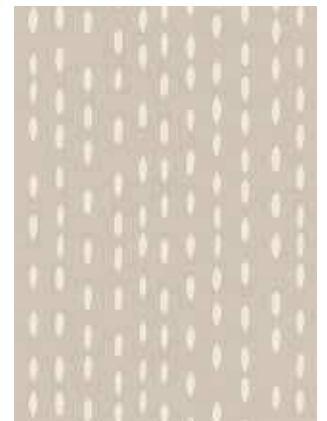


0763 - Rice Greige



0745 - Nest Metal



0737 - Rice Souris




6271 - Uni Grey




0729 - Corner Metal



0753 - Kubes Grey

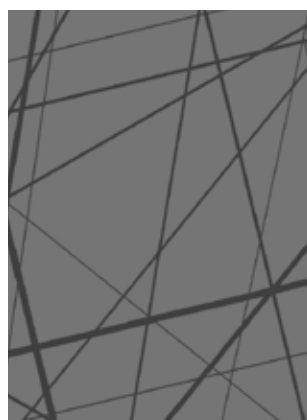

0746 - Nest Black



0778 - Uni Anthracite




0744 - Stars Anthracite


TARALAY IMPRESSION & UNI




0762 - Rice Brown



6265 - Uni Brown

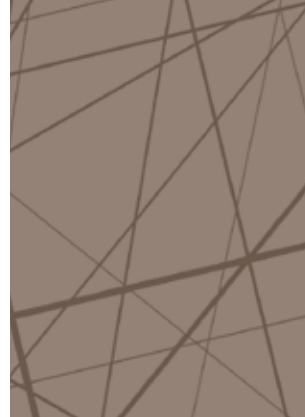

0765 - Nest Taupe

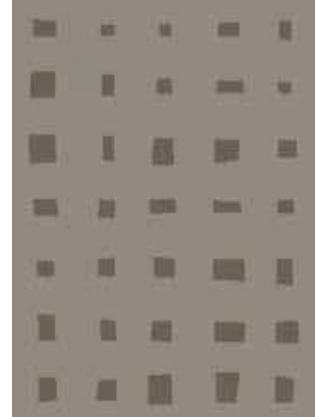


0751 - Kubes Taupe



0741 - Corner Tomette



6270 - Uni Tomette

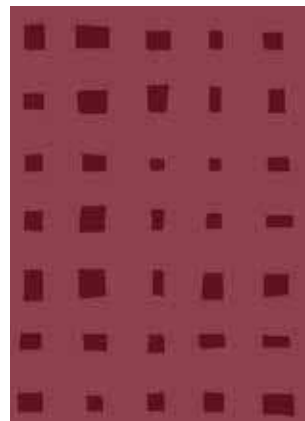

0748 - Kubes Burgundy



0757 - Rice Coquelicot



0738 - Rice Copper



0733 - Corner Copper




0752 - Kubes Gold



0759 - Rice Mustard



6268 - Uni Sun

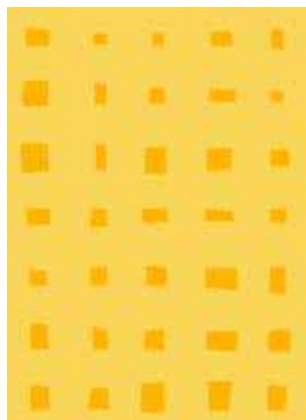

0750 - Kubes Sun



6269 - Uni Orange



0764 - Stars Orange




0739 - Corner Anis



6263 - Uni Anis



0735 - Rice Light Green



6262 - Uni Turquoise



0740 - Corner Turquoise




0747 - Kubes Olive



6264 - Uni Olive



0758 - Rice Sea

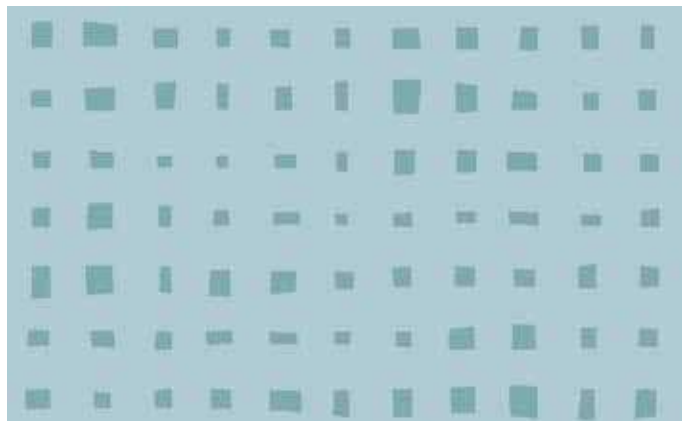


0749 - Kubes Sky



0743 - Stars Baltique



0754 - Kubes Blue



6261 - Uni Blue



0732 - Corner Dark Blue



6260 - Uni Dark Blue

TARALAY IMPRESSION		TARALAY UNI
COMPACT	COMFORT	COMFORT
Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Wood, Cemento, Mohair, Nest, Stars, Gentlemen, Trame, Corner, Kubes, Rice	Uni

DESCRIPTION

Total thickness	EN ISO 24346 [EN 428]	mm	2.00	3.35	3.00
	ASTM F386-02	inch	0.08	0.13	0.1
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.70	0.65	0.65
	ASTM F410-02	inch	0.028	0.026	0.026
Weight	EN ISO 23997 [EN 430]	g/sq.m	2635	2825	2300
Width/length of sheet	EN ISO 24341 [EN 426]	cm / lm	200 / 25	200 / 25	200 / 25
	-	feet - inch	6'6" / 82'	6'6" / 82'	6'6" / 82'

CLASSIFICATION

Norm/product specification	-	-	EN ISO 10582 [EN 649]	EN 651	EN 651
European classification	EN ISO 10874 [EN 685]	class	34 - 43	34 - 42	34 - 42
Fire rating	EN 13 501-1	class	Bfl-s1	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2	< 2
Slip resistance wet: ramp test with oil ⁽¹⁾	DIN 51 130	class	R10	R10	R10

PERFORMANCES

Wear resistance	EN 660.2	mm ³	≤ 2.0	≤ 2.0	≤ 2.0
Wear group	NF 189	group	T	T	T
Type binder content	EN ISO 10582	Type	I	-	-
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.40	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1 [EN 433]	mm	≤ 0.10	≤ 0.20	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.08	≈ 0.11
Impact sound insulation	EN ISO 717-2	dB	8	19	17
Castor chair test (type W)	ISO 4918 [EN 425]	-	OK	OK	OK
Thermal conductivity	EN ISO 10456 [EN 12524]	W/(m.K)	0.25	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Protecsol® 2	Protecsol® 2	Protecsol®
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽²⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growth

ENVIRONMENT / INDOOR QUALITY AIR

TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®	Floorscore®

CE marking

CE	EN 14041	-			
		-			

(1) For lifetime sustainable wet resistance, please refer to Tarasafe ranges
 (2) The implementation of an effective cleaning regime is the best defence against infection

Product description and technical data sheet available in various languages. See our Gerflor Country websites.

Technical data sheets and product descriptions for **TARALAY IMPRESSION COMPACT and COMFORT PLUS** (0.9mm wearlayer) available in the Taralay Impression & Uni product guide.

Installation and Maintenance Guidelines, Complementary ranges available on our Gerflor website.

Rubber leaves indelible stains on vinyl floorings: do not use mats with rubber backing and replace tubular furniture feet with those made of PVC or polyamide. Place mats of sufficient length at entrances to reduce outside sources of dirt.

IMPORTANT: The information contained in this document is valid from 01/04/2017 and is subject to change at any time without notice. In the context of constantly changing technology, our customers are responsible, prior to any use, for checking with us that this document is the version in force.

TARALAY IMPRESSION & UNI, LESS SPEAKING FOR MORE ACTIONS



COMPOSITION
100% REACH compliant



RECYCLABILITY
100%



INDOOR AIR QUALITY
100 times lower than norm requirements (TVOC < 10 µg/m³ after 28 days)



LCA
Eco-designed according to a product-specific life cycle analysis



WELLNESS
Anti slip R10
Comfort version:
Walking comfort < 65 dB (best certification) and impact sound insulation - 19 dB

Be CONNECTED!



www.gerflor.com